


## Technical Data Sheet

**Description: Aluminum Rolling Shutter Slat**

**Code: ARS-55-C2-M**

|                                                     |                              |                                                                                      |                 |
|-----------------------------------------------------|------------------------------|--------------------------------------------------------------------------------------|-----------------|
| Dimensions                                          | 55 mm x 12.5 mm              |  |                 |
| weight of 1m <sup>2</sup>                           | 2.6 kg <sup>[1]</sup>        |                                                                                      |                 |
| No. of slats in 1m height                           | 18.18                        |                                                                                      |                 |
| Insulation                                          | Polyurethane                 |                                                                                      |                 |
| Polyurethane density                                | 60 kg/m <sup>3</sup>         |                                                                                      |                 |
| Max. Width <sup>[2]</sup>                           | 3.60 m (4.10) <sup>[3]</sup> |                                                                                      |                 |
| Max. Height <sup>[2]</sup>                          | 3.25 m                       |                                                                                      |                 |
| Box size according to the height of the shutter(mm) |                              |                                                                                      |                 |
| Box Size                                            | With tube 60 mm              |                                                                                      | With tube 70 mm |
| 150                                                 | 980                          |                                                                                      | -               |
| 165                                                 | 1310                         | -                                                                                    |                 |
| 180                                                 | 1480                         | 1310                                                                                 |                 |
| 205                                                 | 2360                         | 2250                                                                                 |                 |
| 225                                                 | 3460                         | 3180                                                                                 |                 |

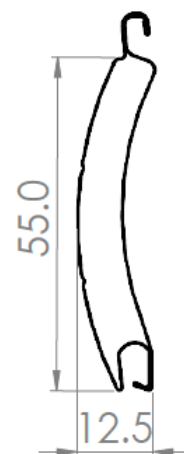

[1] end locks weight is included

[2] Using guide rail GR-25-80-TD according to EN 13659 class1 wind speed 39.8 km/h

[3] Using guide rail GR-27-95-T according to EN 13659 class1 wind speed 39.8 km/h